



With the right connections,
anything is possible.



NextPhase™ Cables to 40 GHz

General Purpose Low Loss

- Low Loss
- Low VSWR
- Excellent Shielding Effectiveness
- Triple Shielded
- FEP Jacket
- Wide Variety of Connectors

The NextPhase™ low loss cable line is designed for general purpose interconnects demanding low loss and triple shielding. Applications include ATE, ground- and air-based EW, and many others where reasonable cost and long lengths are required.

A wide variety of diameters are available to accommodate a wide range of design requirements in terms of bend radii, weight and power performance. A wide variety of connectors are available.

Electrical Data

Maximum Frequency:

912 & 916: 40.0 GHz
919: 24.0 GHz
930: 18.0 GHz

Impedance:

50 Ω nominal

Propagation Velocity:

912: 75.5% nominal
916: 76.0% nominal
919: 76.5% nominal
930: 77.0% nominal

Time Delay:

912: 1.35 ns/ft (4.43 ns/m)
916: 1.34 ns/ft (4.40 ns/m)
919: 1.33 ns/ft (4.36 ns/m)
930: 1.32 ns/ft (4.33 ns/m)

Shielding Effectiveness:

-90 dB minimum (cable only)

Dielectric Withstanding Voltage:

912: 5.0 kV at 60 Hz
916: 7.0 kV at 60 Hz
919: 10.0 kV at 60 Hz
930: 15.0 kV at 60 Hz

Capacitance:

912 & 919: 26.7 pF/ft (87.6 pF/m)
916: 26.9 pF/ft (88.3 pF/m)
930: 26.2 pF/ft (86.0 pF/m)

Mechanical Data

Finished Outer Diameter:

912: 0.126 in (0.320 cm)
916: 0.160 in (0.406 cm)
919: 0.205 in (0.521 cm)
930: 0.305 in (0.775 cm)

Static Bend Radius:

912: 0.6 in (1.524 cm)
916: 0.9 in (2.286 cm)
919: 1.1 in (2.794 cm)
930: 1.8 in (4.572 cm)

Weight with Standard Jacket/Armor:

912: 0.02 lbs/ft (0.030 kg/m)
916: 0.04 lbs/ft (0.060 kg/m)
919: 0.05 lbs/ft (0.074 kg/m)
930: 0.09 lbs/ft (0.134 kg/m)

Operating Temp. Range:

-85 to 392° F (-65 to 200° C)

Above 185° F (85° C) use "T" designation and provide temperature range.

NextPhase™ Cables to 40 GHz (continued)

Cable Construction

Inner Conductor: Solid Ag-plated Cu
Dielectric: PTFE Tape
Outer Conductor: Ag-plated Cu Flat Braid/
Polyamide Foil/Ag-plated Cu Round Braid
Standard Finish: FEP
(a wide variety of other protective finishes and armors available)

Available Connectors

912: 2.4mm, 2.92mm, 3.5mm, SMA, TNC, Type N
916: 1.85 mm, 2.4 mm, 2.9mm, 3.5mm, SMA, TNC, Type N
919: 3.5mm, BNC, SMA, TNC, Type N
930: 7-16 DIN, SMA, TNC, Type N
(maximum frequency dependent on cable; other connectors available)

Specifications

Frequency		912 Series			916 Series			919 Series			930 Series			Conn. Loss dB
		Attenuation		VSWR	Attenuation		VSWR	Attenuation		VSWR	Attenuation		VSWR	
GHz	Band	dB/ft	dB/m		dB/ft	dB/m		dB/ft	dB/m		dB/ft	dB/m		
0.3	UHF	0.092	0.302	1.10	0.065	0.212	1.10	0.044	0.145	1.10	0.031	0.103	1.10	0.006
0.5		0.119	0.391		0.084	0.275		0.057	0.188		0.041	0.133		0.009
0.8		0.152	0.497		0.107	0.351		0.073	0.240		0.052	0.170		0.012
1.0	L	0.170	0.558		0.120	0.394		0.082	0.269		0.058	0.190		0.014
2.0	S	0.243	0.798	1.15	0.173	0.566	1.15	0.118	0.387	1.20	0.083	0.272	1.15	0.024
2.4		0.267	0.877		0.190	0.623		0.130	0.426		0.091	0.299		0.027
3.0		0.300	0.985		0.214	0.702		0.146	0.479		0.103	0.337		0.032
4.0	C	0.349	1.146	1.20	0.250	0.819		1.20	0.170	0.559	1.25	0.119	0.391	1.20
6.0		0.433	1.420		0.311	1.020	0.212		0.696	0.148		0.486	0.055	
8.0	X	0.505	1.656	1.25	0.364	1.195	0.281		0.815	1.30		0.173	0.568	
10.0		0.569	1.867	1.30	0.412	1.352	0.248		0.922		0.195	0.641	1.25	0.084
12.4		0.639	2.098	1.35	0.465	1.526	0.317	1.040	0.220		0.721	1.30	0.101	
15.0	Ku	0.710	2.328		0.518	1.699	0.353	1.158	0.244		0.800		0.118	
18.0		0.785	2.574		0.575	1.886	0.392	1.285	0.270	0.886	1.35	0.139		
20.0	K	0.832	2.729		1.35	0.611	2.004	1.35	0.416	1.365	1.35			
22.0		0.877	2.877	0.646		2.118	0.440		1.442					0.165
24.0		0.921	3.021	0.679		2.228	0.462		1.517	1.45				0.178
26.5		0.973	3.193	1.40		0.720	2.362		-	-				0.194
28.0	Ka	1.004	3.294		0.744	2.439	-		-				0.204	
30.0		1.044	3.425		0.774	2.541	-	-				0.217		
32.0		1.083	3.553		0.805	2.640	-	-				0.230		
34.0		1.121	3.677	1.45	0.834	2.737	-	-				0.243		
36.0		1.158	3.799		0.863	2.833	-	-				0.256		
40.0		1.230	4.036		0.920	3.018	-	-				0.281		

Note: Typical Insertion Loss dB = (Attenuation)(Length) + 2(Conn. Loss)
Attenuation at any frequency = 912: $(0.1654 \times \sqrt{\text{freq GHz}}) + (0.0046 \times \text{freq GHz})$
916: $(0.11522 \times \sqrt{\text{freq GHz}}) + (0.00478 \times \text{freq GHz})$
919: $(0.07882 \times \sqrt{\text{freq GHz}}) + (0.00318 \times \text{freq GHz})$
930: $(0.05621 \times \sqrt{\text{freq GHz}}) + (0.00175 \times \text{freq GHz})$

122 Banner Road, Stroudsburg, PA 18360-6433

Tel: 570-424-8400


Solutions@MegaPhase.com | www.MegaPhase.com




With the right connections,
anything is possible.

NextPhase™ Cables to 40 GHz (continued)


Phase Change vs. Temperature

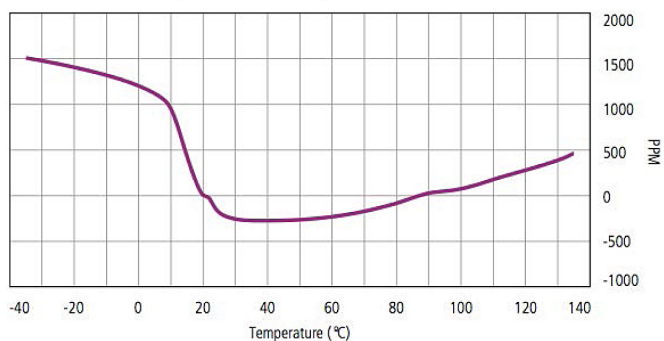


Insertion Loss vs. Temperature

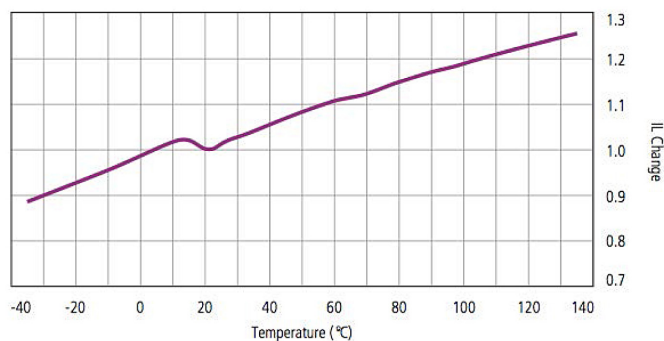

Insertion Loss

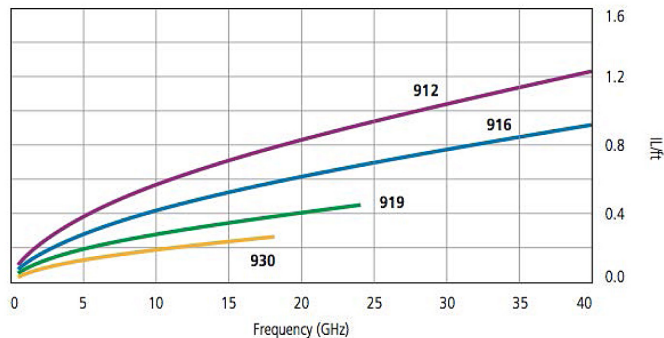

Cable CW Power Handling

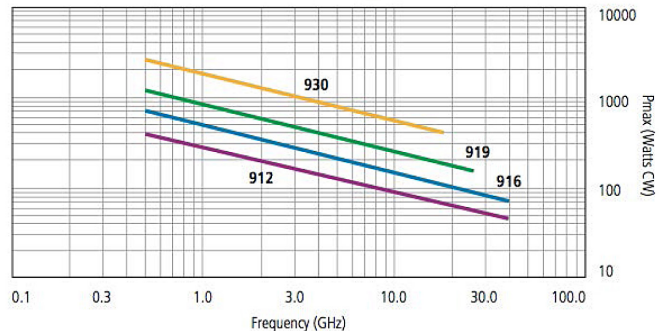

Note: Data at ambient temperature and sea level. Power handling of a cable assembly is also connector dependent and includes variables such as altitude, temperature and system VSWR. See website for connector power handling standards, including altitude, temperature and VSWR derating.